



CITY OF LOMA LINDA

Public Works Department
25541 Barton Road, Loma Linda, CA 92354

ADDENDUM NO. 1

PLANS AND CONSTRUCTION DOCUMENTS FOR THE CONSTRUCTION OF THE:
CALIFORNIA STREET AND STORM DRAIN IMPROVEMENTS
(CIP 14-167)

Bid Date: January 16, 2018 @ 2:00 P.M.

Bid Location: Loma Linda Council Chambers, 25541 Barton Rd., Loma Linda CA 92354


This addendum is issued as a supplement to the bid documents for the City of Loma Linda Contract Documents and Specifications for the above-referenced project. Receipt of this addendum is to be acknowledged by completing the Addenda Acknowledgement of the Bid Proposal, page 12.

Description:

1. This is an additive alternate which will not affect the total bid to be considered for award. This additive alternate may or may not be exercised. In general the additive alternate is to furnish and install 835 lineal feet of nominal 12" diameter (DIPS, OD = 13.2") high density polyethylene (DR17), including excavation, export of native material, pipe assembly and installation, tracer wire with boxes, import and placement of crushed rock pipe zone material, filter fabric, and 2-sack slurry trench backfill.

This addendum:

1. Replace page 18 with this attachment.

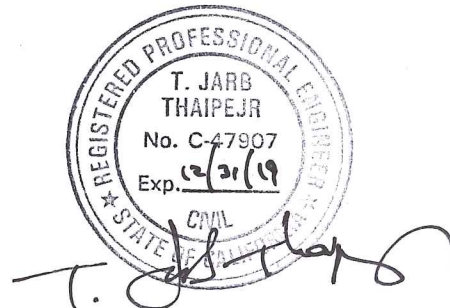

i:\public works admin\bids-specs\addendum 1 california st widening 2018.doc

62	5 EA	Sign R20-1 (CA) Mod. _____ _____ each.	\$ _____	\$ _____
----	------	--	----------	----------

Total Bid \$ _____

Bid written in words

The project's Notice of Inviting Bid, Bid Schedule, Addenda, Plan Holder's List, and Bid Results will be posted on the City's website at www.lomalinda-ca.gov Select *Our City - Public Notices - Inviting Bids for Construction Projects*.

ADDITIVE BID ALTERNATE

ITEM NO.	ESTIMATED QUANTITY	DESCRIPTION (UNIT PRICE IN WORDS)	UNIT PRICE (IN FIGURES)	TOTAL (IN FIGURES)
1	835 LF	Furnish and install nominal 12" diameter (DIPS, OD = 13.2") high density polyethylene (DR17), including excavation, export of native material, pipe assembly and installation, tracer wire with boxes, import and placement of crushed rock pipe zone material, filter fabric, and 2-sack slurry trench backfill. _____ _____ per lineal foot.	\$ _____	\$ _____

TOTAL \$ _____

*Bid written in words**

***NOTE:** The unit price must be written in words and also shown in figures. The total price must be estimated for each item of work and the total of all items inserted in the space provided. Bidder must bid on all bid schedules; the City will award the contract to the responsible bidders' lowest total bid, not inclusive of the additive bid alternate.